




CWT 2147 Regular

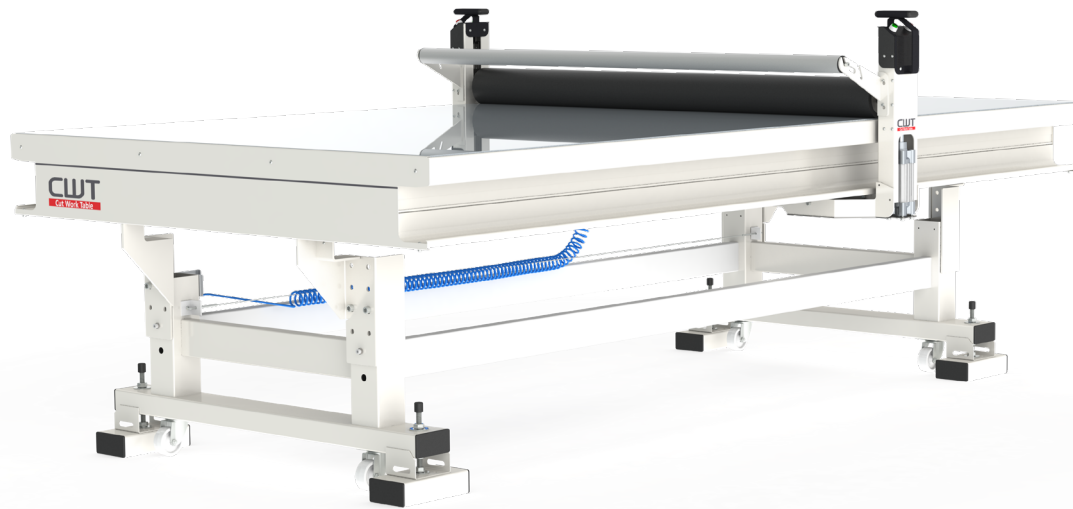

See cwtworktools.com for complete model program and accessories.

FACTS

PART NO	CWT 214710
CAPACITY UP TO	180 m ² /h (1940sq. ft./h)
TABLE LENGTH	4700mm (15ft. in.)
TABLE WIDTH	2100mm (6ft. 1in.)
LENGTH OF WORKING AREA	4260mm (13ft. 12in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	2050mm (6ft. 9in.)
OVERALL WIDTH	2330mm (7ft. 8in.)
OVERALL HEIGHT	1620mm (5ft. 4in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.8 in.)
WORK HEIGHT	744-950mm (2ft. 5in. - 3ft. 1in.)
WORK HEIGHT ADJUSTEMENT*	Manual
BED SURFACE	Tempered safety glass
POWER SUPPLY**	230V/50Hz (10A) / 120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	750kg (1653lbs)
GROSS WEIGHT	970kg (2138lbs)
PACKING DIMENSIONS	4940x560x2400 mm (16ft. 3in. x 1ft. 10in. x 7ft. 6in.)
WARRANTY	3 years

FEATURES

CUTTING MAT, SELF HEALING	Yes
LED ILLUMINATED LIGHT TABLE	Option
ROLL HOLDER FOR GUIDE BEAM	Yes
EXTRA LOWER ROLL HOLDER	Option
TABLE TOP ROLL HOLDER	Option
SIDE POCKETS	Yes
SILENT COMPRESSOR	Option
SECOND GLIDE BEAM	Option
WHEELS	Yes
LEVELING FEET	Yes
PREMIUM UPGRADE KIT***	Option

* Select 1 of 4 fixed heights at installation

** Only when including Premium upgrade kit

*** Premium upgrade kit includes: LED illuminated light table, extra lower roll holder and roll holder for table top



CWT 2140 Regular



See cwtworktools.com for complete model program and accessories.

FACTS

PART NO	CWT 214010
CAPACITY UP TO	170 m ² /h (1820sq. ft./h)
TABLE LENGTH	4000mm (13ft. 1in.)
TABLE WIDTH	2100mm (6ft. 1in.)
LENGTH OF WORKING AREA	3560mm (11ft. 8in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	2050mm (6ft. 9in.)
OVERALL WIDTH	2330mm (7ft. 8in.)
OVERALL HEIGHT	1620mm (5ft. 4in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.8 in.)
WORK HEIGHT	744-950mm (2ft. 5in. - 3ft. 1in.)
WORK HEIGHT ADJUSTEMENT*	Manual
BED SURFACE	Tempered safety glass
POWER SUPPLY**	230V/50Hz (10A) / 120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	640kg (1410lbs)
GROSS WEIGHT	840kg (1852lbs)
PACKING DIMENSIONS	4150x560x2400 mm (13ft. 8in. x 1ft. 10in. x 7ft. 11in.)
WARRANTY	3 years

FEATURES

CUTTING MAT, SELF HEALING	Yes
LED ILLUMINATED LIGHT TABLE	Option
ROLL HOLDER FOR GUIDE BEAM	Yes
EXTRA LOWER ROLL HOLDER	Option
TABLE TOP ROLL HOLDER	Option
SIDE POCKETS	Yes
SILENT COMPRESSOR	Option
SECOND GLIDE BEAM	Option
WHEELS	Yes
LEVELING FEET	Yes
PREMIUM UPGRADE KIT***	Option



* Select 1 of 4 fixed heights at installation

** Only when including Premium upgrade kit

*** Premium upgrade kit includes: LED illuminated light table, extra lower roll holder and roll holder for table top



CWT 1847 Regular

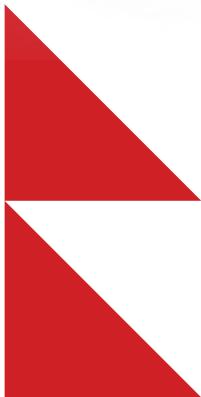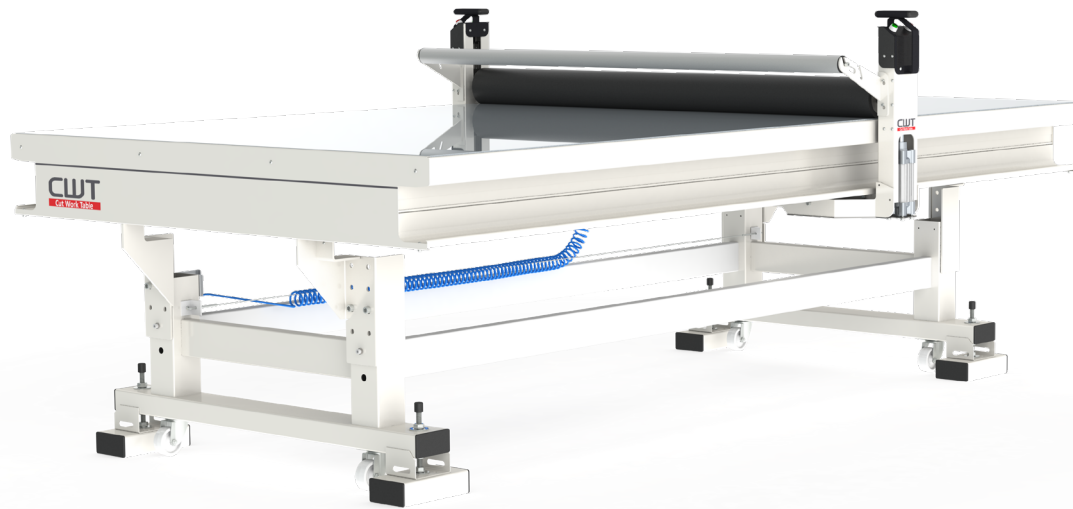

See cwtworktools.com for complete model program and accessories.

FACTS

PART NO	CWT 184710
CAPACITY UP TO	160 m ² /h (1720sq. ft./h)
TABLE LENGTH	4700mm (15ft. in.)
TABLE WIDTH	1800mm (5ft. 1in.)
LENGTH OF WORKING AREA	4260mm (13ft. 12in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	1730mm (5ft. 8in.)
OVERALL WIDTH	2010mm (6ft. 7in.)
OVERALL HEIGHT	1620mm (5ft. 4in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.8 in.)
WORK HEIGHT	744-950mm (2ft. 5in. - 3ft. 1in.)
WORK HEIGHT ADJUSTEMENT*	Manual
BED SURFACE	Tempered safety glass
POWER SUPPLY**	230V/50Hz (10A) / 120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	660kg (1455lbs)
GROSS WEIGHT	840kg (1852lbs)
PACKING DIMENSIONS	4940x560x2300 mm (16ft. 3in. x 1ft. 10in. x 7ft. 6in.)
WARRANTY	3 years

FEATURES

CUTTING MAT, SELF HEALING	Yes
LED ILLUMINATED LIGHT TABLE	Option
ROLL HOLDER FOR GUIDE BEAM	Yes
EXTRA LOWER ROLL HOLDER	Option
TABLE TOP ROLL HOLDER	Option
SIDE POCKETS	Yes
SILENT COMPRESSOR	Option
SECOND GLIDE BEAM	Option
WHEELS	Yes
LEVELING FEETS	Yes
PREMIUM UPGRADE KIT***	Option


* Select 1 of 4 fixed heights at installation

** Only when including Premium upgrade kit

*** Premium upgrade kit includes: LED illuminated light table, extra lower roll holder and roll holder for table top



CWT 1840 Regular

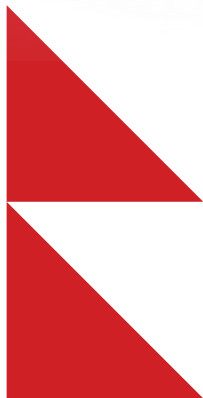

See cwtworktools.com for complete model program and accessories.

FACTS

PART NO	CWT 164010
CAPACITY UP TO	Up to 150 m ² /h (1600sq. ft./h)
TABLE LENGTH	4000mm (13ft. 1in.)
TABLE WIDTH	1800mm (5ft. 1in.)
LENGTH OF WORKING AREA	3560mm (11ft. 8in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	1730mm (5ft. 8in.)
OVERALL WIDTH	2010mm (6ft. 7in.)
OVERALL HEIGHT	1620mm (5ft. 4in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.8 in.)
WORK HEIGHT	744-950mm (2ft. 5in. - 3ft. 1in.)
WORK HEIGHT ADJUSTEMENT*	Manual
BED SURFACE	Tempered safety glass
POWER SUPPLY**	230V/50Hz (10A) / 120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	560kg (1234lbs)
GROSS WEIGHT	715kg (1576lbs)
PACKING DIMENSIONS	4150x560x2300 mm (13ft. 8in. x 1ft. 10in. x 7ft. 6in.)
WARRANTY	3 years

FEATURES

CUTTING MAT, SELF HEALING	Yes
LED ILLUMINATED LIGHT TABLE	Option
ROLL HOLDER FOR GUIDE BEAM	Yes
EXTRA LOWER ROLL HOLDER	Option
TABLE TOP ROLL HOLDER	Option
SIDE POCKETS	Yes
SILENT COMPRESSOR	Option
SECOND GLIDE BEAM	Option
WHEELS	Yes
LEVELING FEETS	Yes
PREMIUM UPGRADE KIT***	Option


* Select 1 of 4 fixed heights at installation

** Only when including Premium upgrade kit

*** Premium upgrade kit includes: LED illuminated light table, extra lower roll holder and roll holder for table top



CWT 1647 Regular

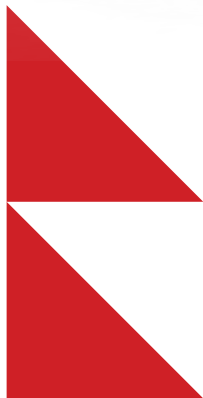

See cwtworktools.com for complete model program and accessories.

FACTS

PART NO	CWT 184010
CAPACITY UP TO	Up to 150 m ² /h (1600sq. ft./h)
TABLE LENGTH	4700mm (15ft. in.)
TABLE WIDTH	1600mm (5ft. 3in.)
LENGTH OF WORKING AREA	4260mm (13ft. 12in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	1560mm (5ft. 1.5in.)
OVERALL WIDTH	1810mm (5ft. 11in.)
OVERALL HEIGHT	1620mm (5ft. 4in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.8 in.)
WORK HEIGHT	744-950mm (2ft. 5in. - 3ft. 1in.)
WORK HEIGHT ADJUSTEMENT*	Manual
BED SURFACE	Tempered safety glass
POWER SUPPLY**	230V/50Hz (10A) or 120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	590kg (1300lbs)
GROSS WEIGHT	770kg (1698lbs)
PACKING DIMENSIONS	4940x560x2300mm (16ft. 3in. x 1ft. 10in. x 7ft. 6in.)
WARRANTY	3 years

FEATURES

CUTTING MAT, SELF HEALING	Yes
LED ILLUMINATED LIGHT TABLE	Option
ROLL HOLDER FOR GUIDE BEAM	Yes
EXTRA LOWER ROLL HOLDER	Option
TABLE TOP ROLL HOLDER	Option
SIDE POCKETS	Yes
SILENT COMPRESSOR	Option
SECOND GLIDE BEAM	Option
WHEELS	Yes
LEVELING FEETS	Yes
PREMIUM UPGRADE KIT***	Option


* Select 1 of 4 fixed heights at installation

** Only when including Premium upgrade kit

*** Premium upgrade kit includes: LED illuminated light table, extra lower roll holder and roll holder for table top



CWT 1640 Regular

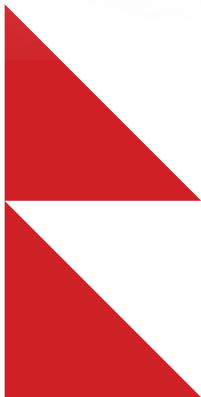

See cwtworktools.com for complete model program and accessories.

FACTS

PART NO	CWT 164010
CAPACITY UP TO	Up to 140 m ² /h (1500sq. ft./h)
TABLE LENGTH	4000mm (13ft. in.)
TABLE WIDTH	1600mm (5ft. 3in.)
LENGTH OF WORKING AREA	3560mm (11ft. 8in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	1560mm (5ft. 1.5in.)
OVERALL WIDTH	1810mm (5ft. 11in.)
OVERALL HEIGHT	1620mm (5ft. 4in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.8 in.)
WORK HEIGHT	744-950mm (2ft. 5in. - 3ft. 1in.)
WORK HEIGHT ADJUSTEMENT*	Manual
BED SURFACE	Tempered safety glass
POWER SUPPLY**	230V/50Hz (10A) or 120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	500kg (1102lbs)
GROSS WEIGHT	655kg (1444lbs)
PACKING DIMENSIONS	4150x560x2300mm (13ft. 8in. x 1ft. 10in. x 7ft. 6in.)
WARRANTY	3 years

FEATURES

CUTTING MAT, SELF HEALING	Yes
LED ILLUMINATED LIGHT TABLE	Option
ROLL HOLDER FOR GUIDE BEAM	Yes
EXTRA LOWER ROLL HOLDER	Option
TABLE TOP ROLL HOLDER	Option
SIDE POCKETS	Yes
SILENT COMPRESSOR	Option
SECOND GLIDE BEAM	Option
WHEELS	Yes
LEVELING FEETS	Yes
PREMIUM UPGRADE KIT***	Option



* Select 1 of 4 fixed heights at installation

** Only when including Premium upgrade kit

*** Premium upgrade kit includes: LED illuminated light table, extra lower roll holder and roll holder for table top



CWT 1630 Regular

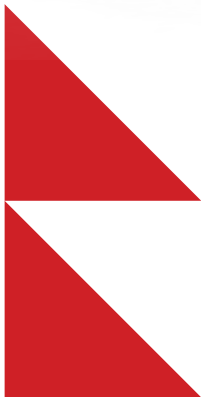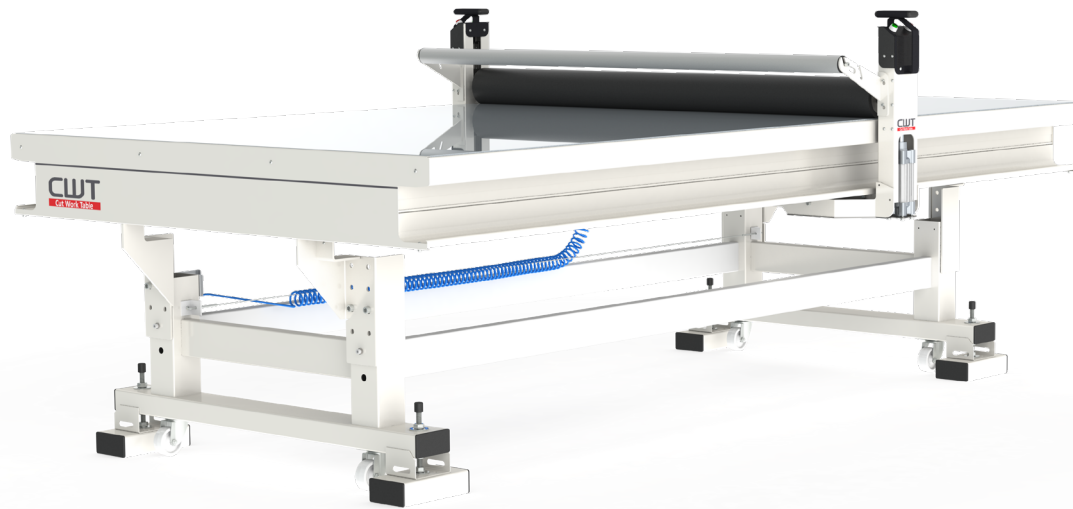

See cwtworktools.com for complete model program and accessories.

FACTS

PART NO	CWT 163010
CAPACITY UP TO	Up to 120 m ² /h (1290sq. ft./h)
TABLE LENGTH	3000mm (9ft. 1in.)
TABLE WIDTH	1600mm (5ft. 3in.)
LENGTH OF WORKING AREA	2560mm (8ft. 5in.)
WIDTH OF WORKING AREA/ROLLER WIDTH	1560mm (5ft. 1.5in.)
OVERALL WIDTH	1810mm (5ft. 11in.)
OVERALL HEIGHT	1620mm (5ft. 4in.)
MAX. THICKNESS OF SUBSTRATE	0-70mm (0-2.8in.)
WORK HEIGHT	744-950mm (2ft. 5in. - 3ft. 1in.)
WORK HEIGHT ADJUSTEMENT*	Manual
BED SURFACE	Tempered safety glass
POWER SUPPLY**	230V/50Hz (10A) or 120V/60Hz (15A)
REQUIRED AIR SUPPLY	6-8bar (87-116psi)
NET WEIGHT	380kg (838lbs)
GROSS WEIGHT	525kg (1157lbs)
PACKING DIMENSIONS	3550x560x2300mm (11ft. 8in. x 1ft. 10in. x 7ft. 6in.)
WARRANTY	3 years

FEATURES

CUTTING MAT, SELF HEALING	Yes
LED ILLUMINATED LIGHT TABLE	Option
ROLL HOLDER FOR GUIDE BEAM	Yes
EXTRA LOWER ROLL HOLDER	Option
TABLE TOP ROLL HOLDER	Option
SIDE POCKETS	Yes
SILENT COMPRESSOR	Option
SECOND GLIDE BEAM	Option
WHEELS	Yes
LEVELING FEETS	Yes
PREMIUM UPGRADE KIT***	Option

* Select 1 of 4 fixed heights at installation

** Only when including Premium upgrade kit

*** Premium upgrade kit includes: LED illuminated light table, extra lower roll holder and roll holder for table top