

ReTac®

Textures CANVAS

ADDS VISUAL INTEREST TO ANY PRINT


ReTac® Textures Canvas can add depth and visual appeal to static, flat images with its embossed canvas finish. With ReTac® on the back, eye-catching graphics printed on ReTac® Textures Canvas can easily be removed and repositioned multiple times without the worry of adhesive residue being left behind. This phthalate-free film is flame resistant and can be easily applied, re-positioned and removed without surface damage or loss of adhesion.



- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS
- CAN BE REMOVED WITHOUT LEAVING ADHESIVE RESIDUE


6 mil White Phthalate-Free Polymeric PVC  Matte

 (Eco) Solvent Latex UV

 ReTac® ultra removable and re-positionable adhesive

 Widths up to 54 in

 **5 YEARS DURABILITY** INTERIOR AND EXTERIOR (2 YEAR REMOVABILITY EXTERIOR)

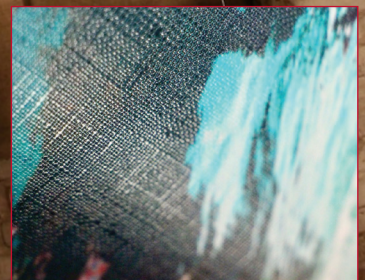

APPLICATIONS

- Smooth Flat Surfaces
- Point Of Sale Graphics
- Interior Décor
- Decals & Stickers



DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

Textures CANVAS

ReTac® Textures Canvas is a 150µ (6 mil) printable, matte white phthalate-free polymeric PVC film with ReTac® ultra removable adhesive. It has an embossed canvas like finish that adds depth and visual appeal to static, flat graphics. A subtle texture like canvas draws attention to your image or message in a distinct and creative way. The film is also flame resistant according to FTMS 191, Method 5903.

- RETAC® TEXTURES IS A PHTHALATE-FREE FILM.
- IDEAL FOR WALL GRAPHICS, CUSTOM WALL MURALS, INTERIOR DÉCOR, RETAIL DISPLAYS, TRADE SHOW GRAPHICS AND SIGNAGE, AND TEXTURED LABELS.
- RETAC® TEXTURES HAS BEEN TESTED TO FTMS 191, METHOD 5903 FOR FLAME RESISTANCE, MAKING IT PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS, SUCH AS AIRPORTS, HOTELS AND HOSPITALS.

For more information,
performance and warranty guide
lines please contact your local
Drytac office.

© 2018 Drytac Corporation. E&OE.
All other trademarks are the property
of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Matte White Polymeric PVC
Adhesive	ReTac® ultra removable and re-positionable adhesive technology
Release Liner	143 gsm 2 Side PE Coated, 1 Side Solventless Siliconised Fine Paper

PRODUCT CHARACTERISTIC

Film Thickness	6 mil (150µ) 7 mil
Adhesive Layer	1 mil (25µ) (175µ)
Film/Adhesive Ratio	6:1
UV Protection Factor	Not Applicable
Outdoor Durability	5 year; 2 years removability
Application Temperature	>41°F (5°C)
Service Temperature Range	-4°F to 149°F (-20°C to 65°C)
Flame Retardancy	FTMS 191 (According to Method 5903)
Shelf Life	2 years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

INSTALLATION RECOMMENDATION

Please see Wall Graphic Installation & Removal Instructions for further details. The surface must be clean and smooth and free of defects before application.

DRYTAC®
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

105 Nuggett Court,
Brampton,
Ontario, L6T 5A9,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5601 Eastport Boulevard,
Richmond,
Virginia, 23231,
USA
customerservice@drytac.com
Tel: +1 800.280.6013